

Accessory LED luminaires | Accessories

M12 cables, plug connectors for assembly M12, M12 distributor

Description	Product no.	Cable length	Material cable	Design	Operating voltage
Sensor cable	200100-01	5 m	PUR	M12 socket/M12 plug, A-coded	24V DC
Sensor cable	200100-02	2.5 m	PUR	M12 socket/M12 plug, A-coded	24V DC
Sensor cable	200100-03	10 m	PUR	M12 socket/M12 plug, A-coded	24V DC
Sensor cable	200100-04	5 m	PUR	M12 socket /open, four-core, A-coded	24V DC
Sensor cable	200100-05	2.5 m	PUR	M12 socket /open, four-core, A-coded	24V DC
Sensor cable	200100-06	10 m	PUR	M12 socket /open, four-core, A-coded	24V DC
Sensor cable	200100-05	2.5 m	PUR	M12 socket /open, four-core, A-coded	24V DC
Sensor cable	200100-07	5 m	PUR	M12 socket angled /open, four-core, A-coded	24V DC
Sensor cable	200100-09	2.5 m	PUR	M12 socket /open, five-core, A-coded	24V DC
Sensor cable	200100-10	5 m	PUR	M12 socket /open, five-core, A-coded	24V DC
Sensor cable	200100-14	5 m	PUR	M12 socket /open, S-coded	220-240V AC
Sensor cable	200100-15	2.5 m	PUR	M12 socket /open, S-coded	220-240V AC
Sensor cable	200100-16	10 m	PUR	M12 socket /open, S-coded	220-240V AC
M12 Sensor/actuator box	200300-01	10 m	PUR	BOX, 4 plug-in slots	24V DC



Description	Product no.	Design	Operating voltage
M12 sockets	200200-01	M12 socket straight	24V DC
M12 sockets	200200-11	M12 socket straight	220-240V AC
M12 sockets	200200-02	M12 socket angled	24V DC
M12 T-piece	200200-03	M12 T-piece, A-coded	24V DC
M12 plug	200200-04	M12 plug straight	24V DC




M12 lines, FDA approved materials, for food and beverages – 24V DC A-coded

Description	Product no.	Line length	Material cable	Design	Operating voltage
Sensor cable, TPE grey, seal EPDM, coupler V4A, 5 m, M12 socket/M12 plug	201100-01	5 m	TPE grey, seal EPDM, coupler V4A	M12 socket /M12 plug	24V DC
Sensor cable, TPE grey, seal EPDM, coupler V4A, 5 m, socket/open line end	201100-04	5 m	TPE grey, seal EPDM, coupler V4A	socket/open	24V DC
Sensor cable, TPE grey, seal EPDM, coupler V4A, 10 m, socket/open line end	201100-06	10 m	TPE grey, seal EPDM, coupler V4A	socket/open	24V DC



Power supply units (PSU)

Description	Product no.	Power consumption	Input voltage	Output voltage	Design
Plug-in power supply	210100-03	36 W	110-240V AC	24V DC	M12
Table power supply	210100-02	60 W	110-240V AC	24V DC	M12
Table power supply	210100-05	120 W	110-240V AC	24V DC	M12
Power supply, IP67	210100-06	60 W	110-240V AC	24V DC	M12
Power supply, IP67	210100-07	100 W	110-240V AC	24V DC	M12
Power supply, IP67	210100-08	150 W	110-240V AC	24V DC	M12
DIN rail power supply	210100-01	72 W	110-240V AC	24V DC	-
DIN rail power supply	210100-04	480 W	110-240V AC	24V DC	-
DIN rail power supply	210100-09	120 W	110-240V AC	24V DC	-
DIN rail power supply	210100-10	240 W	110-240V AC	24V DC	-

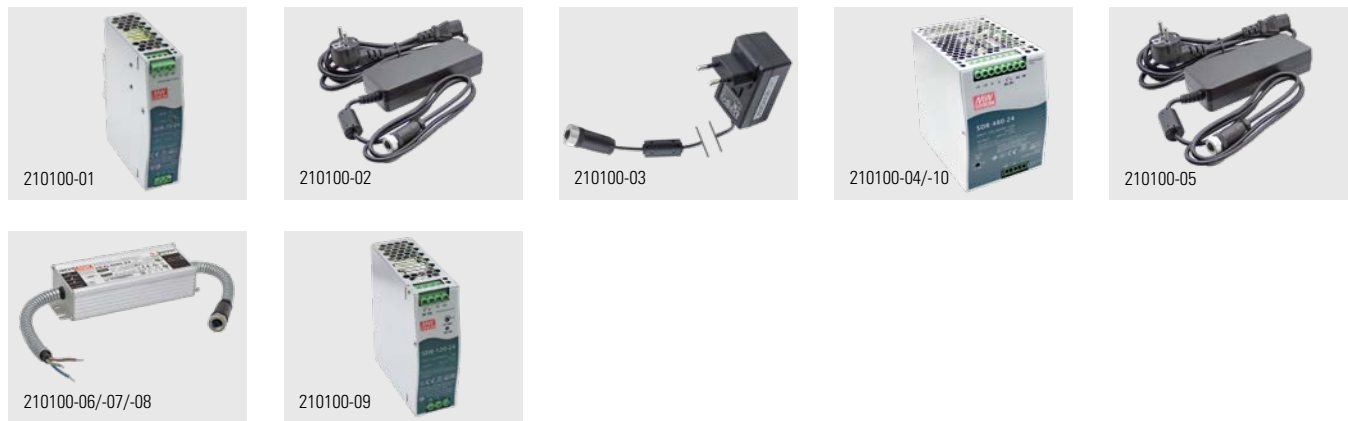

Mounting for Flexarm luminaires

Description	Product no.
Base plate for LED luminaire, steel Ø20cm (for magnetic base)	220200-03
Base plate for LED luminaire, steel (for magnetic base)	220300-01
Wall bracket, also for T-slot profile (for screw-on base, 60x60 mm)	220300-02



External dimmer (for all 24V DC luminaires, except for RGB)

Description	Product no.	Degree of protection	Current intensity	Input voltage	Output
DIMMbox (for control cabinet)	210700-01	IP20	max. 4.0 A	24V DC	96 W
DIMMbox, for T-slot, ready for connection	210700-04	IP40	max. 4.0 A	24V DC	96 W

